



DOWNLIGHT GALAXY

D. GALAXY 40W / 55W



	⚡	CCT	💡	IP	📏	🔄	🌙	📶	🏠
40W	100-240V AC	3.000K - 5.500	3.600 lm	50	180°	●	○	EC-3586	5ud.
55W	100-240V AC	3.000K - 5.500	5.000 lm	50	180°	●	○	EC-3589	5ud.



DOWNLIGHT FEAR

D. FEAR 18W



New system to take advantage of your old downlight.
Nuevo sistema para aprovechar los downlight ya existentes.


	⚡	CCT	💡	IP	📏	🔄	🌙	📶	🏠
18W	100-240V AC	2.700K	2.000 lm	40	108°	—	○	EC-1492	50ud.
18W	100-240V AC	4.000K	2.050 lm	40	108°	—	○	EC-1490	50ud.
18W	100-240V AC	5.500K	2.150 lm	40	108°	—	○	EC-1491	50ud.



D. GALAXY 40W / 55W



D. FEAR 18W

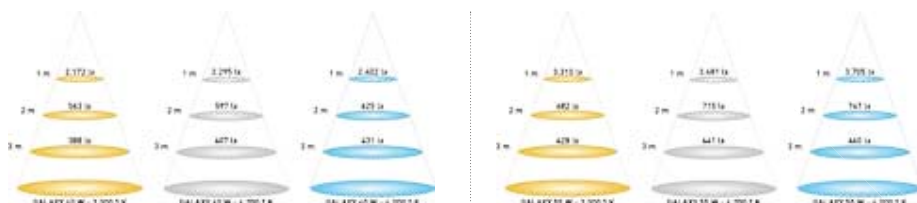

CHIP: **EPSTAR** CRI>80 Δ PF≥0,90 °C -20°C / +50°C **ecologic** 40.000h 100K ON/OFF LED



CHIP: **SAMSUNG** CRI>80 Δ PF≥0,90 °C -25°C / +50°C **ecologic** 50.000h 100K ON/OFF LED