



DISPONIBLE
AVAILABLE

DOWNLIGHT EXTRAFINO CUADRADO 6W / 12W

(EXTRAFINE SQUARE / EXTRA-FIN CARRÉ / QUADRATISCH EXTRAFEIN)

D. EXTRAFINO CUADRADO 6W



D. EXTRAFINO CUADRADO 12W



	⚡	CCT	💡	IP	📐	🌀	🌞	📊	🌀
6W	165-245V AC	3.000K	400 lm	40	160°	—	○	EC-3450	40ud.
6W	165-245V AC	4.200K	450 lm	40	160°	—	○	EC-3451	40ud.
6W	165-245V AC	6.000K	500 lm	40	160°	—	○	EC-3452	40ud.
6W	165-245V AC	3.000K	400 lm	40	160°	—	●	EC-3453	40ud.
6W	165-245V AC	4.200K	450 lm	40	160°	—	●	EC-3454	40ud.
6W	165-245V AC	6.000K	500 lm	40	160°	—	●	EC-3455	40ud.
12W	165-245V AC	3.000K	750 lm	40	160°	—	○	EC-3456	20ud.
12W	165-245V AC	4.200K	790 lm	40	160°	—	○	EC-3457	20ud.
12W	165-245V AC	6.000K	810 lm	40	160°	—	○	EC-3458	20ud.
12W	165-245V AC	3.000K	750 lm	40	160°	—	●	EC-3459	20ud.
12W	165-245V AC	4.200K	790 lm	40	160°	—	●	EC-3460	20ud.
12W	165-245V AC	6.000K	810 lm	40	160°	—	●	EC-3461	20ud.



DISPONIBLE
AVAILABLE

DOWNLIGHT EXTRAFINO CUADRADO 18W / 24W

(EXTRAFINE SQUARE / EXTRA-FIN CARRÉ / QUADRATISCH EXTRAFEIN)

D. EXTRAFINO CUADRADO 18W



D. EXTRAFINO CUADRADO 24W



	⚡	CCT	💡	IP	📐	🌀	🌞	📊	🌀
18W	160-245V AC	3.000K	1.350 lm	40	160°	—	○	EC-2500	20ud.
18W	160-245V AC	4.200K	1.450 lm	40	160°	—	○	EC-2501	20ud.
18W	160-245V AC	6.000K	1.500 lm	40	160°	—	○	EC-2502	20ud.
18W	160-245V AC	3.000K	1.350 lm	40	160°	—	●	EC-2530	20ud.
18W	160-245V AC	4.200K	1.450 lm	40	160°	—	●	EC-2531	20ud.
18W	160-245V AC	6.000K	1.500 lm	40	160°	—	●	EC-2532	20ud.
24W	165-245V AC	3.000K	1.650 lm	40	160°	—	○	EC-3462	10ud.
24W	165-245V AC	4.200K	1.700 lm	40	160°	—	○	EC-3463	10ud.
24W	165-245V AC	6.000K	1.750 lm	40	160°	—	○	EC-3464	10ud.
24W	165-245V AC	3.000K	1.650 lm	40	160°	—	●	EC-3465	10ud.
24W	165-245V AC	4.200K	1.700 lm	40	160°	—	●	EC-3466	10ud.
24W	165-245V AC	6.000K	1.750 lm	40	160°	—	●	EC-3467	10ud.

6W



12W



18W



24W




D. EXTRAFINO CUADRADO 6W





D. EXTRAFINO CUADRADO 12W



D. EXTRAFINO CUADRADO 18W

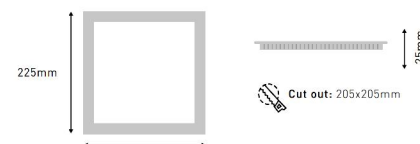

D. EXTRAFINO CUADRADO 18W

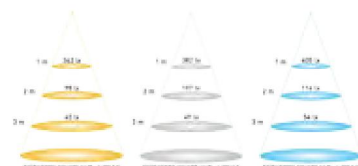

CHIP: EPSTAR

CRI>80

PF≥0,9

-30°C
+45°C

ecoTIC

≈50.000h

100K ON/OFF
LED

CHIP: EPSTAR

CRI>80

PF≥0,9

-30°C
+45°C

ecoTIC

≈50.000h

100K ON/OFF
LED