

DISPONIBLE
AVAILABLE

REMO

REMO 48W



	⚡	CCT	💡	IP	◀	●		⊞
48W	100-240V	2.700K	4.000 lm	20	160°	○	EC-3120	2ud.
48W	100-240V	4.200K	4.200 lm	20	160°	○	EC-3121	2ud.
48W	100-240V	5.500K	4.400 lm	20	160°	○	EC-3122	2ud.
48W	100-240V	2.700K	4.000 lm	20	160°	●	EC-2740	2ud.
48W	100-240V	4.200K	4.200 lm	20	160°	●	EC-2741	2ud.
48W	100-240V	5.500K	4.400 lm	20	160°	●	EC-2742	2ud.

DISPONIBLE
AVAILABLE

REMO - FUENTES DE ALIMENTACIÓN

(DRIVERS / SOURCES DE COURANT / STROMQUELLEN)

FUENTES DE ALIMENTACIÓN



ECOLUX



ELT

	Mod.	®	W ^{RP}	-mA-	Hz	PF		⊞
PANEL 48W REMO	ECO	ECOLUX	42W	1.050mA	50 - 60 Hz	0,90	EC-3650	25ud.
PANEL 48W REMO	LC148 1050	ELT	42W	1.050mA	50 - 60 Hz	0,90	EC 3651	25ud.

ECOLUX >>



ELT >>

BAJO PEDIDO
UNDER ORDER
SUR DEMANDE

REMO - FUENTES DE ALIMENTACIÓN REGULABLES

(DIMMABLE DRIVERS / SOURCES DE COURANT RÉGLABLE / REGULIERBARE STROMQUELLEN)

FUENTES DE ALIMENTACIÓN REGULABLES



ECO-48-1050



LCM-60



LCM-60-DA



PCD-60-1050

	Mod.	®	W ^{RP}	-mA-	Hz	⚡		⊞
PANEL 48W REMO	ECO-48-1050	ECOLUX	60W	1.050mA	50 - 60 Hz	Recorte de fase	EC-3655	20ud.
PANEL 48W REMO	PCD-60-1050	MEAN WELL	60W	1.050mA	50 - 60 Hz	Recorte de fase	EC-3656	30ud.
PANEL 48W REMO	LCM-60	MEAN WELL	60,3W	1.050mA	47 - 63 Hz	0-10V	EC-3657	54ud.
PANEL 48W REMO	LCM-60-DA	MEAN WELL	60,3W	1.050mA	50 - 60 Hz	DALI	EC-3658	54ud.



ECOLUX >>



MEAN WELL >>

DRIVER
PÁGINA
CONTIGUA

REMO 48W

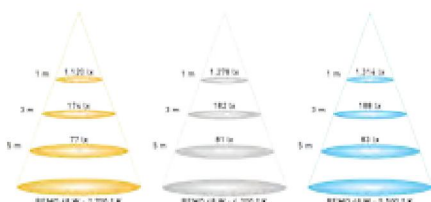

CHIP: LP1STAR

CRI > 0.98
0.90

PF ≥ 0,90

-25°C
+55°C

eco

≈35.000h

100K ON/OFF
LED